

High Voltage Tolerance Capacitors

- High voltage tolerant (6.3V guaranteed) and highly reliable.
- Ideal for backing up of Li-battery-backed equipment such as cameras, video and telephone sets.






Marking color: White print on an indigo sleeve

Specifications

Item	Performance						
Category temperature range (°C)	-25 to +70						
Tolerance at rated capacitance (%)	-20 to +80						
Internal resistance at 1 kHz	Rated capacitance (F)	0.047	0.1	0.47	0.68	1.0	
	Internal resistance (Ω)	300	200	50	50	30	
Characteristics at high and low temperature	Percentage of capacitance change Internal resistance	Within ±30% of the value at 20°C less than five times of the value at 20°C					
F 1 (70%)	Test time	1000 hours					
Endurance (70°C)	Percentage of capacitance change Internal resistance	Within ±30% of the initial measured value Less than four times of the initial specified value					
Shelf life (70°C)	Test time: 1000 hours; Same as endurance.						
Applicable standards	Conforms to JIS C5160-1 2009 (IEC 62391-1 2006)						

Outline Drawing

Unit: mm

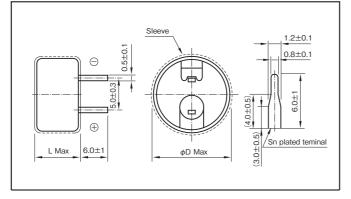

Part numbering system (example : 6.3V0.1F)						
DK	_	6R3	D	104	Т	
Series code Max.operating voltage symbol			Rated capacitance symbol			

Part number is refer to below table.

Standard Ratings

Max. operating voltage (V) Rated capacitance (ELNA Parts No.	φD×L (mm)
6.3	0.047	DK-6R3D473T	13.5×9.5
6.3	0.1	DK-6R3D104T	13.5×9.5
6.3	0.47	DK-6R3D474T	21.5×9.5
6.3	0.68	DK-6R3D684T	21.5×9.5
6.3	1.0	DK-6R3D105T	21.5×9.5